

10ft Traditional Apex
Gable-Door-End
Windowless Workshop
6000 Range[©]
Technical Details



For Queries and Help
please call Product
Support:
01636 858377

PROPRIETARY AND CONFIDENTIALITY

All the information contained within this document including all technical data, dimensions, shape/form and branding (inc. Trademarks, logos, etc.) Is the sole property of Kybotech Limited. The reproduction and/or disclosure to any third party of any information contained within this document is strictly prohibited. Breaches of the copyright will be dealt with on the highest level of severity with immediate legal proceedings.

Sizes available
available in standard 16mm shiplap cladding



Windowless Workshop
W10ft x D20ft




Windowless Workshop
W10ft x D16ft



Windowless Workshop
W10ft x D12ft


10ft Traditional Apex
Gable-Door-End
Windowless Workshop
6000 Range
Front elevation: width 3.187m/10'5"

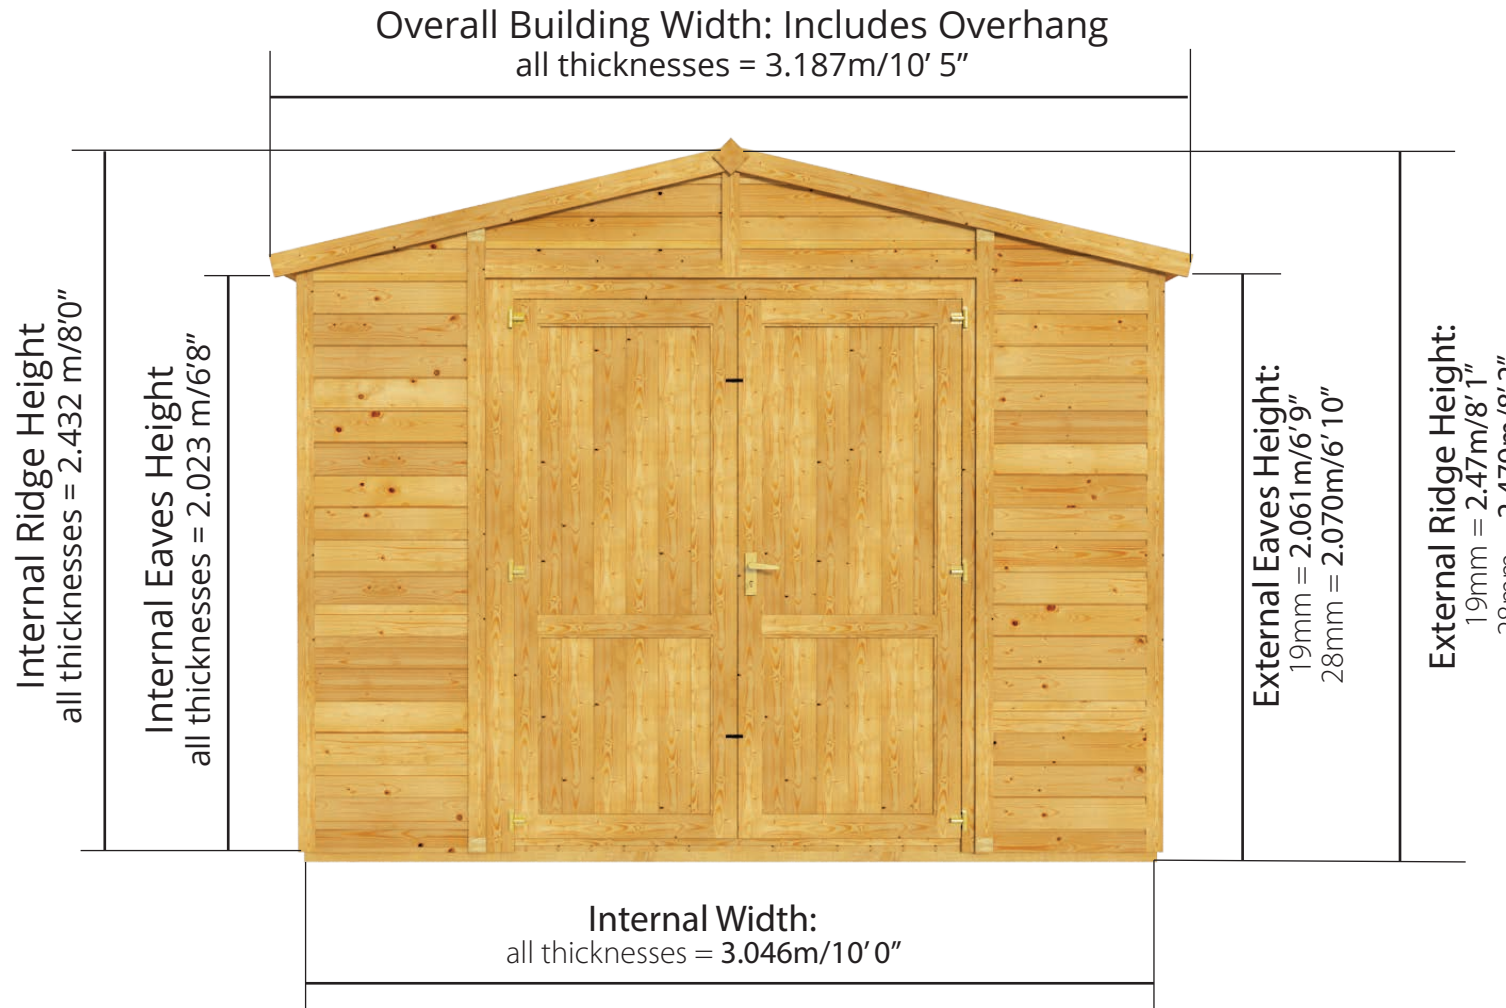

W3.187m x D5.946m / W10'5" x D19'6"


Tongue & Groove Windowless Workshop:

Side elevation

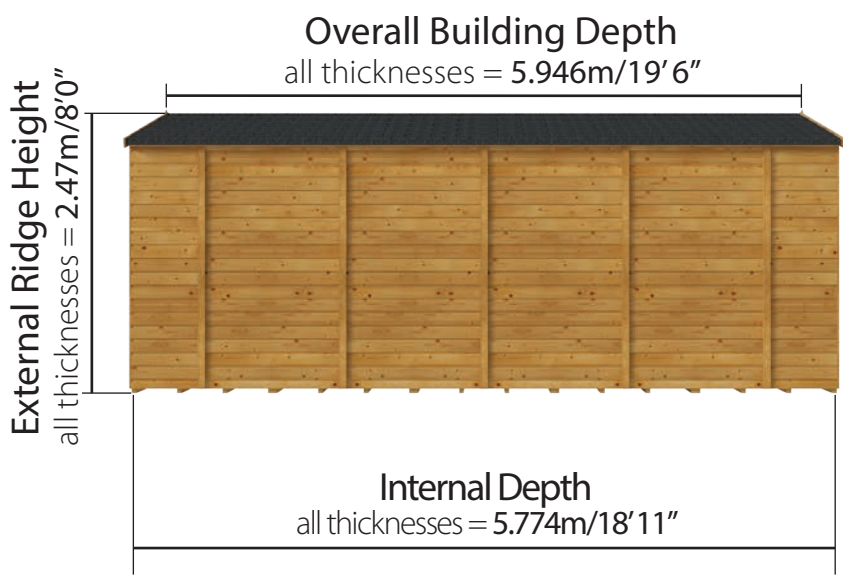


Front of Building

Floor Plan

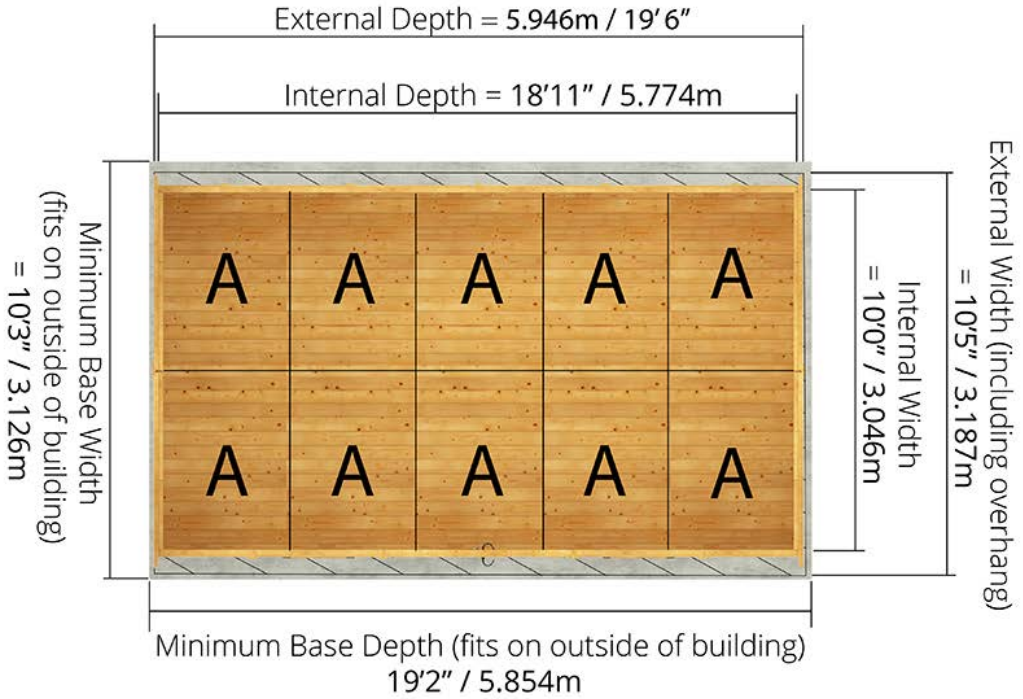

Floor Profile

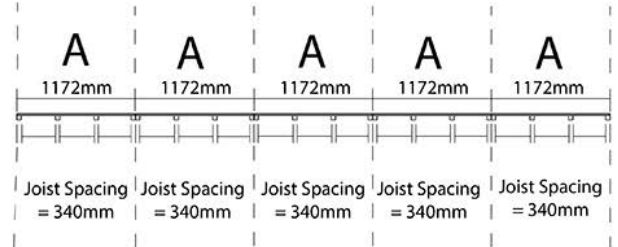


Please note: your base must be perfectly level and drainage is required to allow water to run off the surface. There must also be at least 2m clearance on each side to allow annual treatment to be applied.

W3.187m x D4.774m / W10'5" x D15'8"


Tongue & Groove Windowless Workshop:

Side elevation

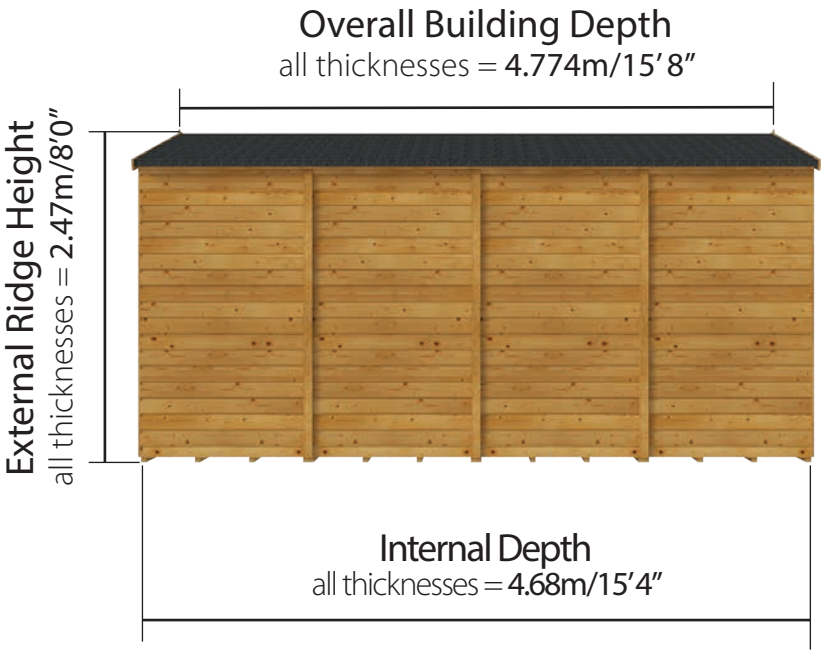


Front of Building

Floor Plan

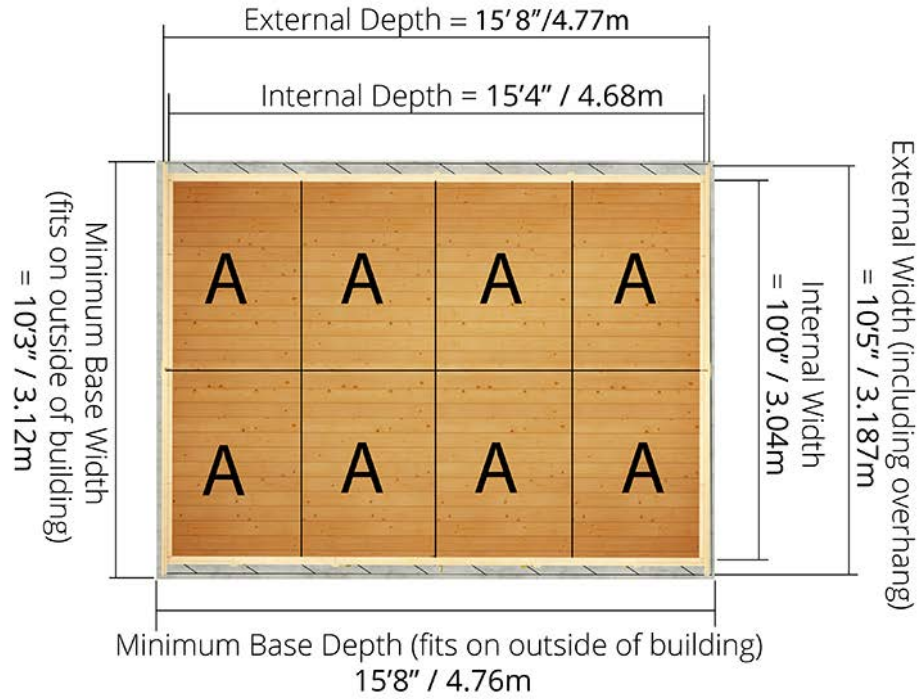

Floor Profile

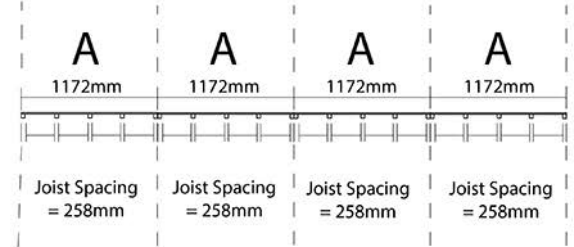


Please note: your base must be perfectly level and drainage is required to allow water to run off the surface. There must also be at least 2m clearance on each side to allow annual treatment to be applied.

W3.187m x D3.602m / W10'5" x D11'10"


Tongue & Groove Windowless Workshop:

Side elevation

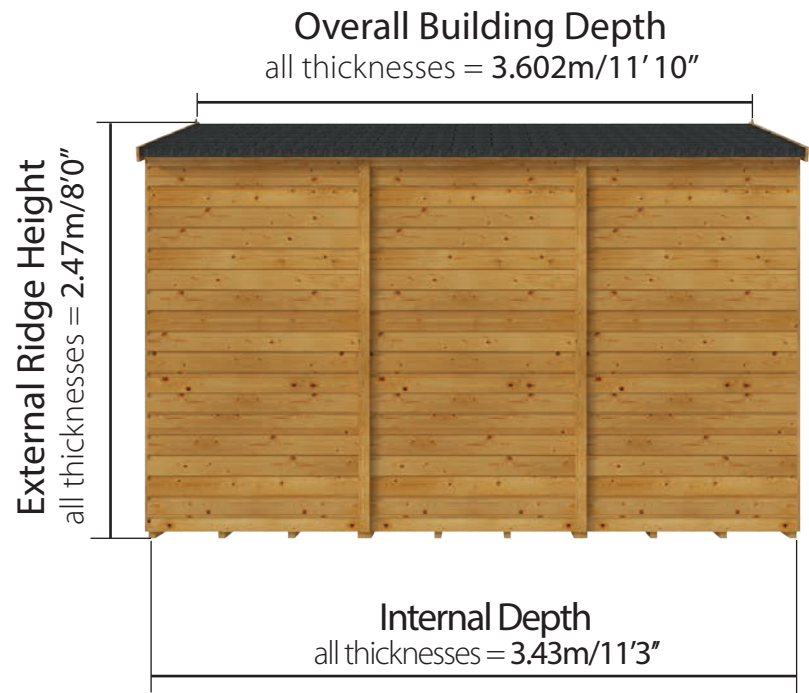


Front of Building

Floor Plan

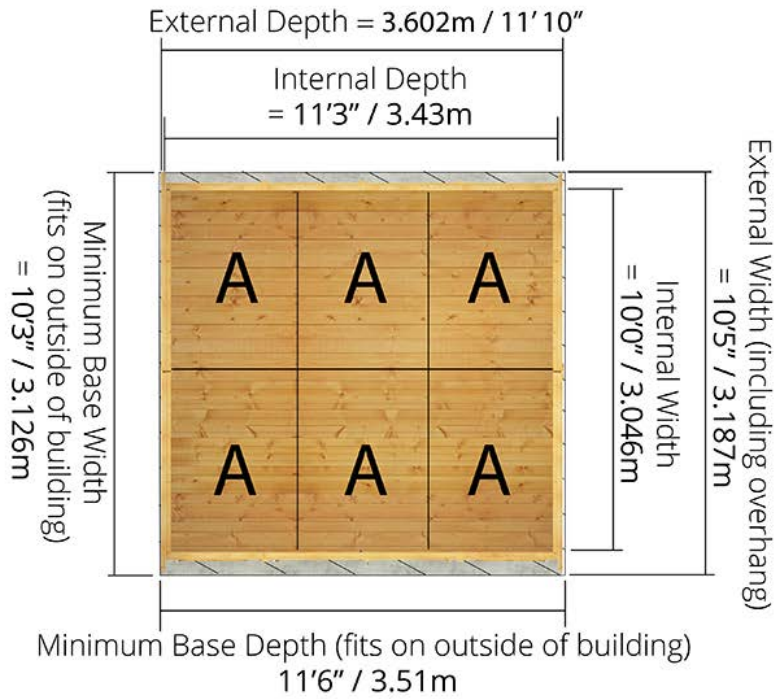

Floor Profile

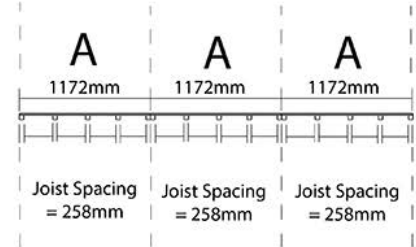

Please note: your base must be perfectly level and drainage is required to allow water to run off the surface. There must also be at least 2m clearance on each side to allow annual treatment to be applied.