

Clubman® Log Cabin

Technical Details



For Queries and Help
Please access call
01636 858377

PROPRIETARY AND CONFIDENTIALITY

All the information contained within this document including all technical data, dimensions, shape/form and branding (inc. Trademarks, logos, etc.) Is the sole property of Kybotech Limited. The reproduction and/or disclosure to any third party of any information contained within this document is strictly prohibited. Breaches of the copyright will be dealt with on the highest level of severity with immediate legal proceedings.

Clubman Log Cabin

Front elevation: width 3.2m

Sizes available

available in standard 19mm cladding types




Clubman I Log Cabin
W3.2m x D2.6m




Clubman II Log Cabin
W3.2m x D3.2m

W3.2m x D2.6m / W10'6" x D8'6"

Clubman I: Side elevation

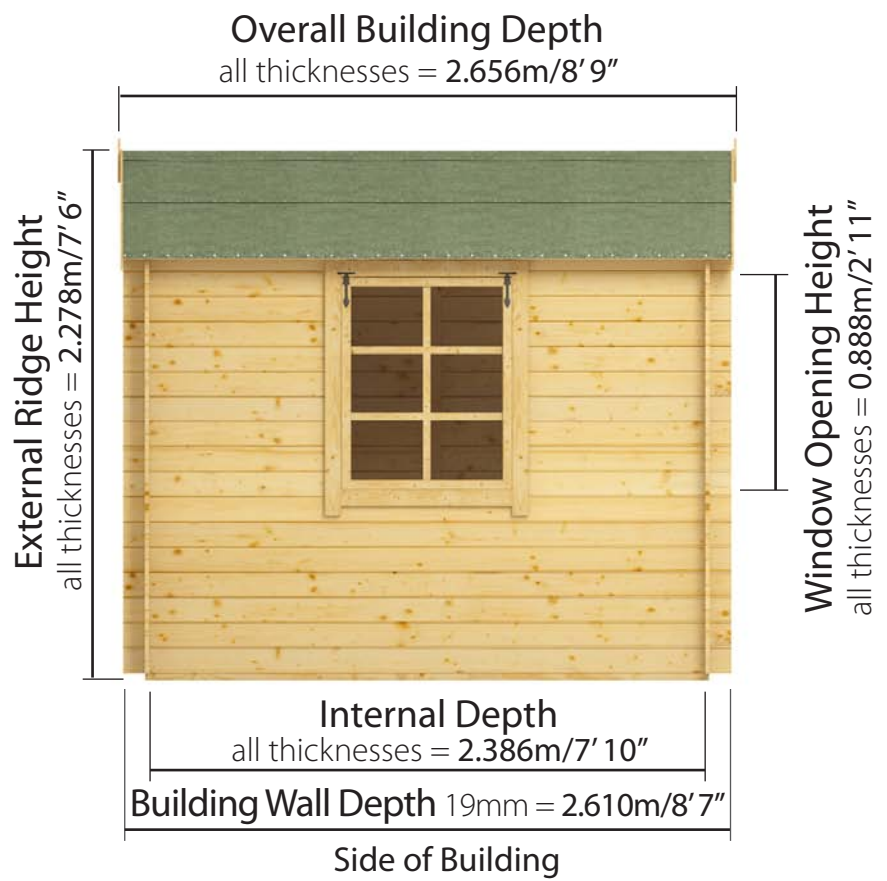


Base Size and Bearers Layout

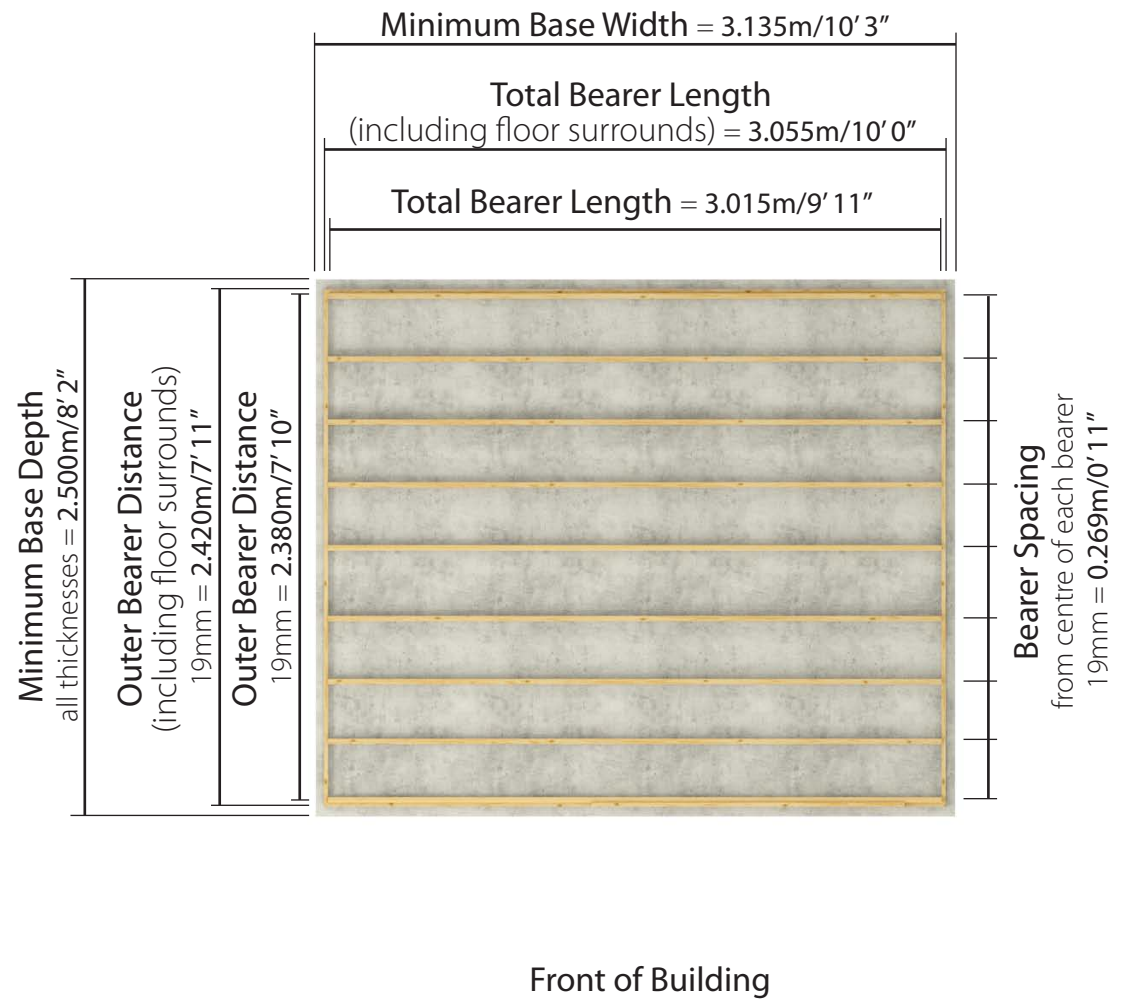


Please note: your base must be perfectly level and drainage is required to allow water to run off the surface. There must also be at least 2m clearance on each side to allow annual treatment to be applied.

W3.2m x D4.0m / W10'6" x D13'1"

Clubman I including Verandah: Side elevation

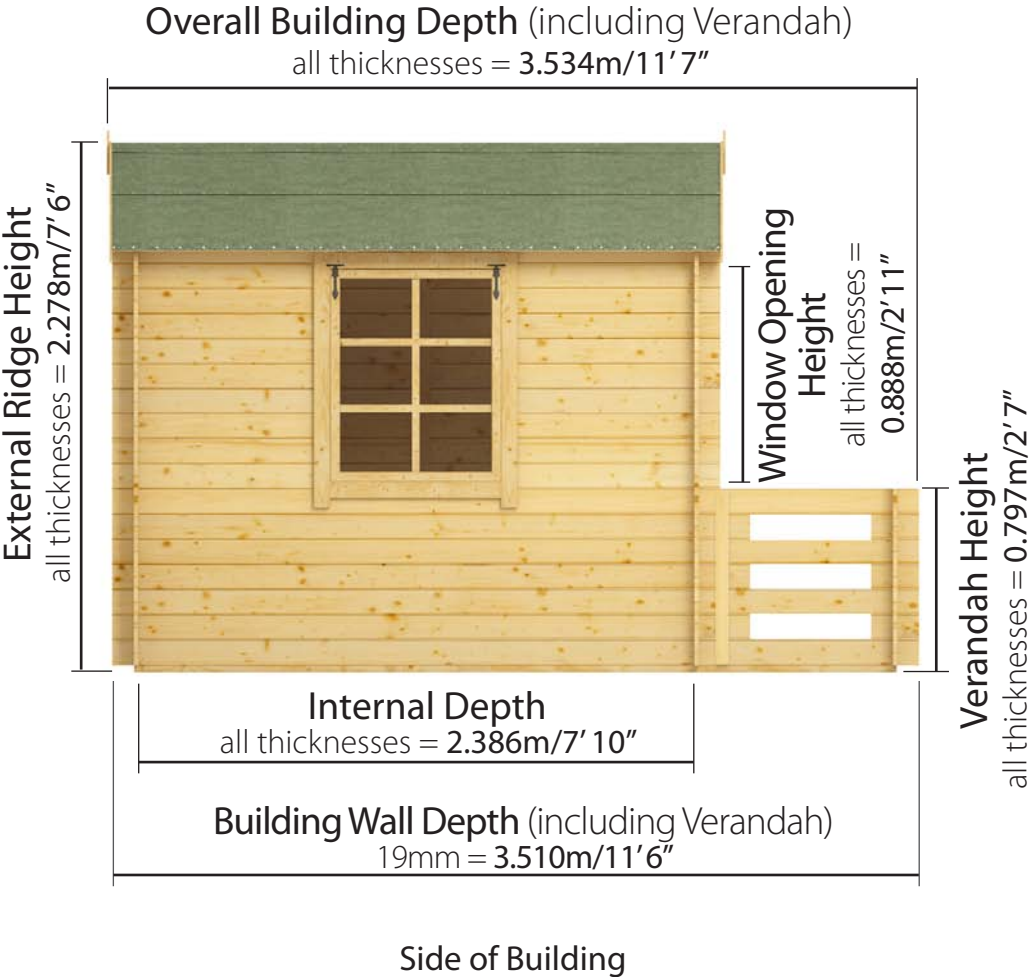


Base Size and Bearers Layout

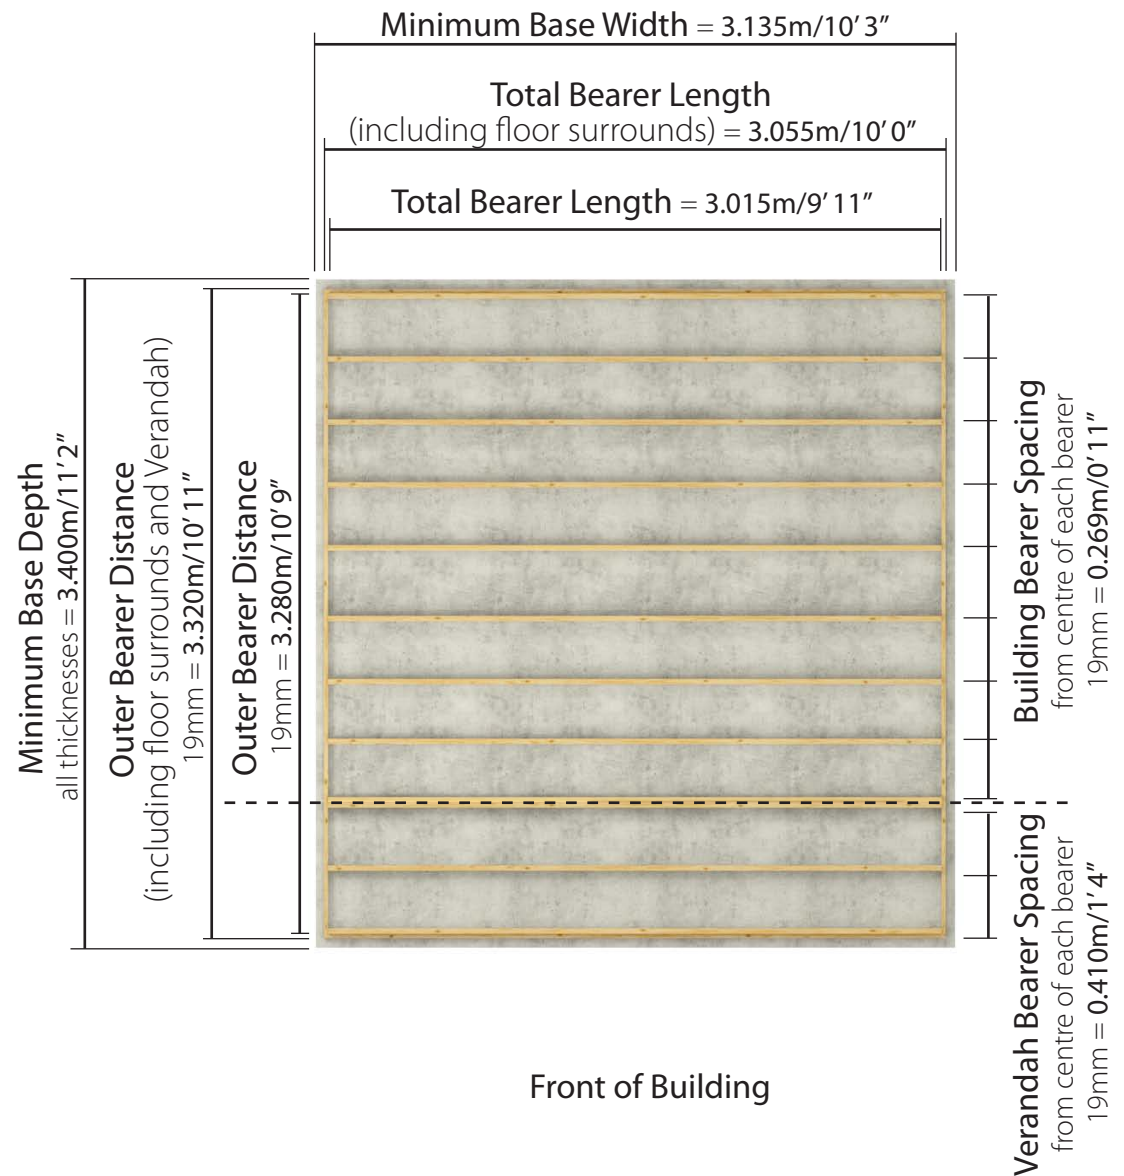


Please note: your base must be perfectly level and drainage is required to allow water to run off the surface. There must also be at least 2m clearance on each side to allow annual treatment to be applied.

W3.2m x D3.2m / W10'6" x D10'6"

Clubman II: Side elevation

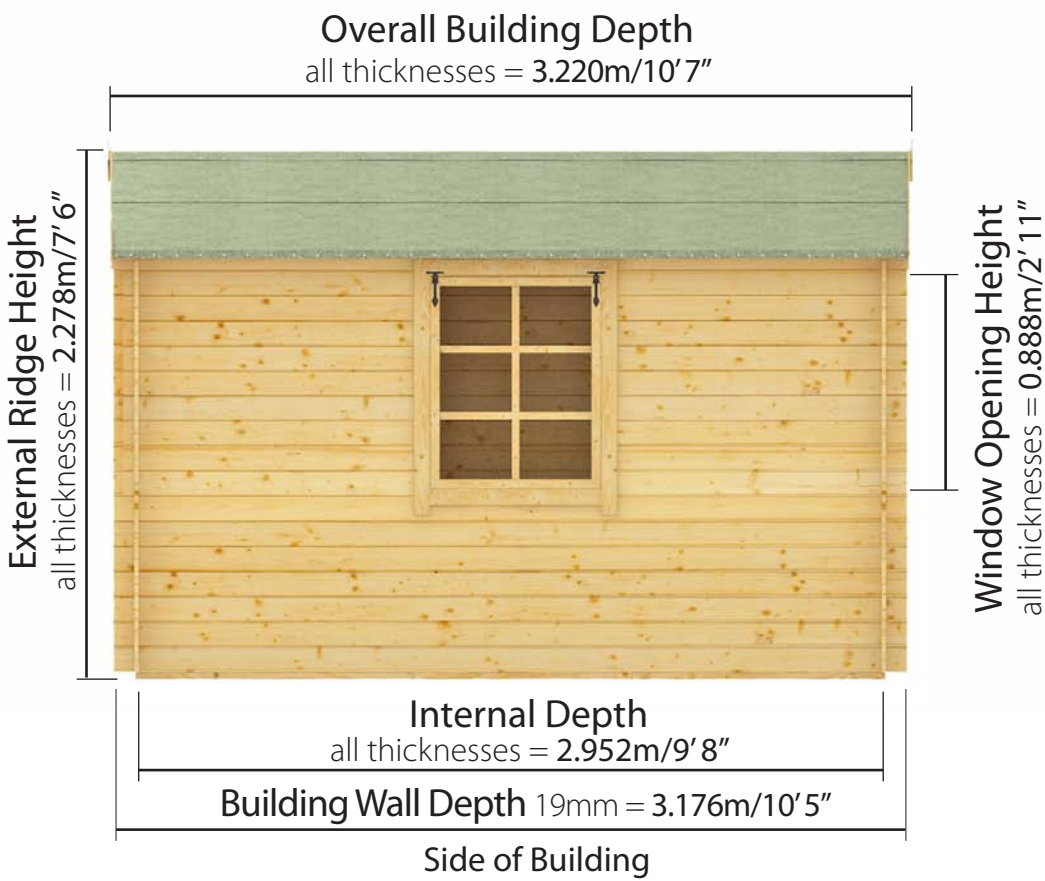


Base Size and Bearers Layout

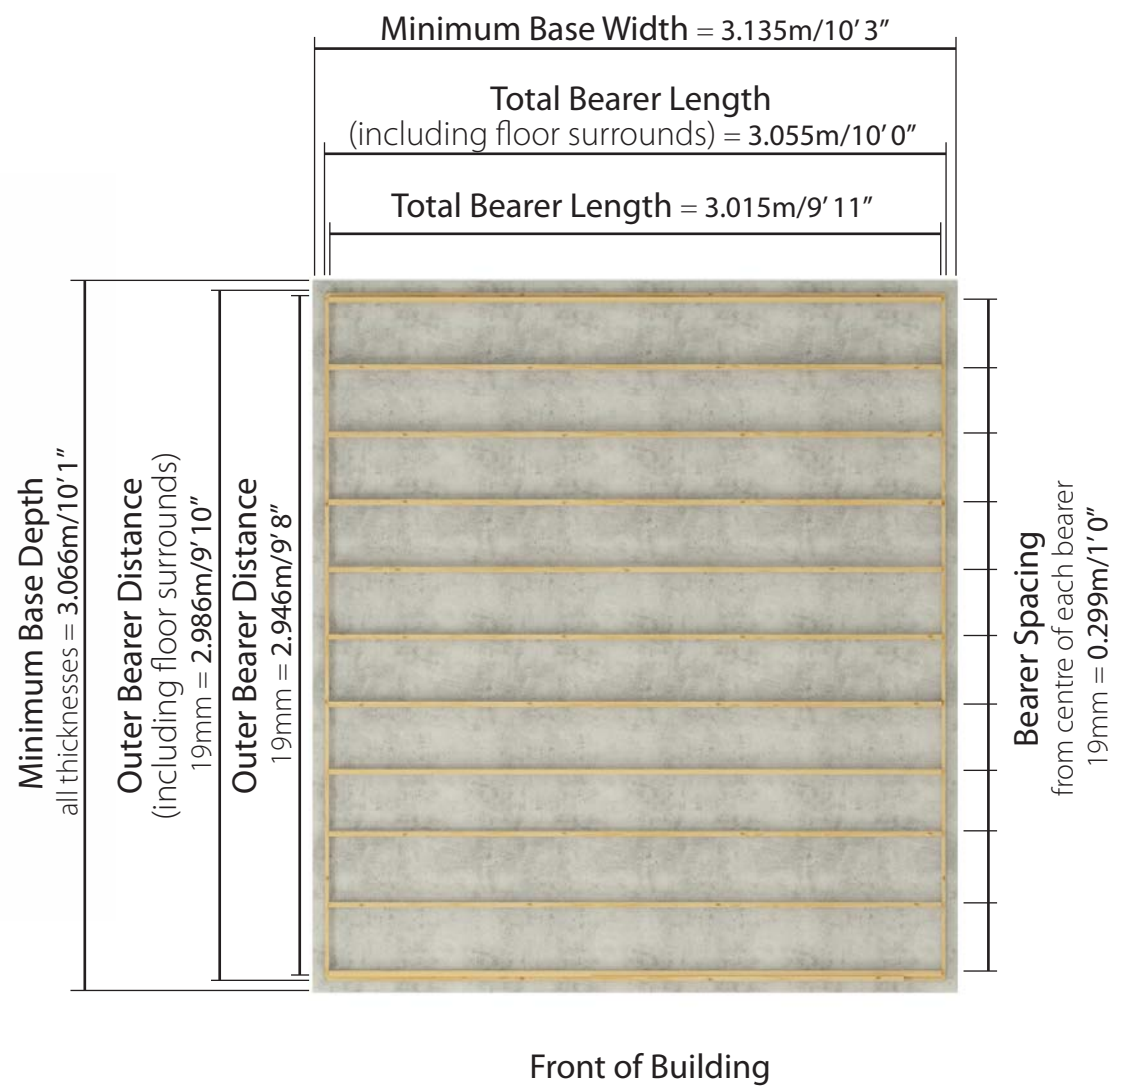


Please note: your base must be perfectly level and drainage is required to allow water to run off the surface. There must also be at least 2m clearance on each side to allow annual treatment to be applied.

W3.2m x D4.1m / W10'6" x D13'5" Clubman II including Verandah: Side elevation

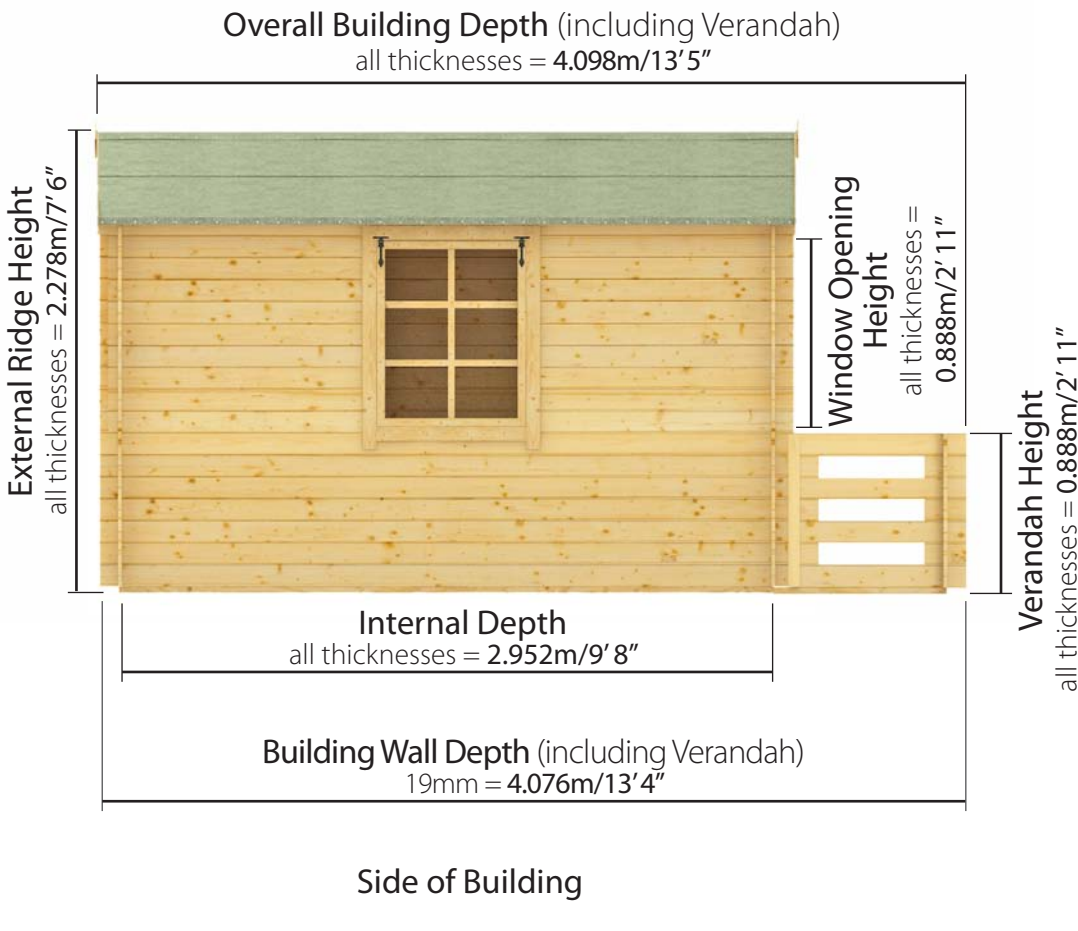

Base Size and Bearers Layout

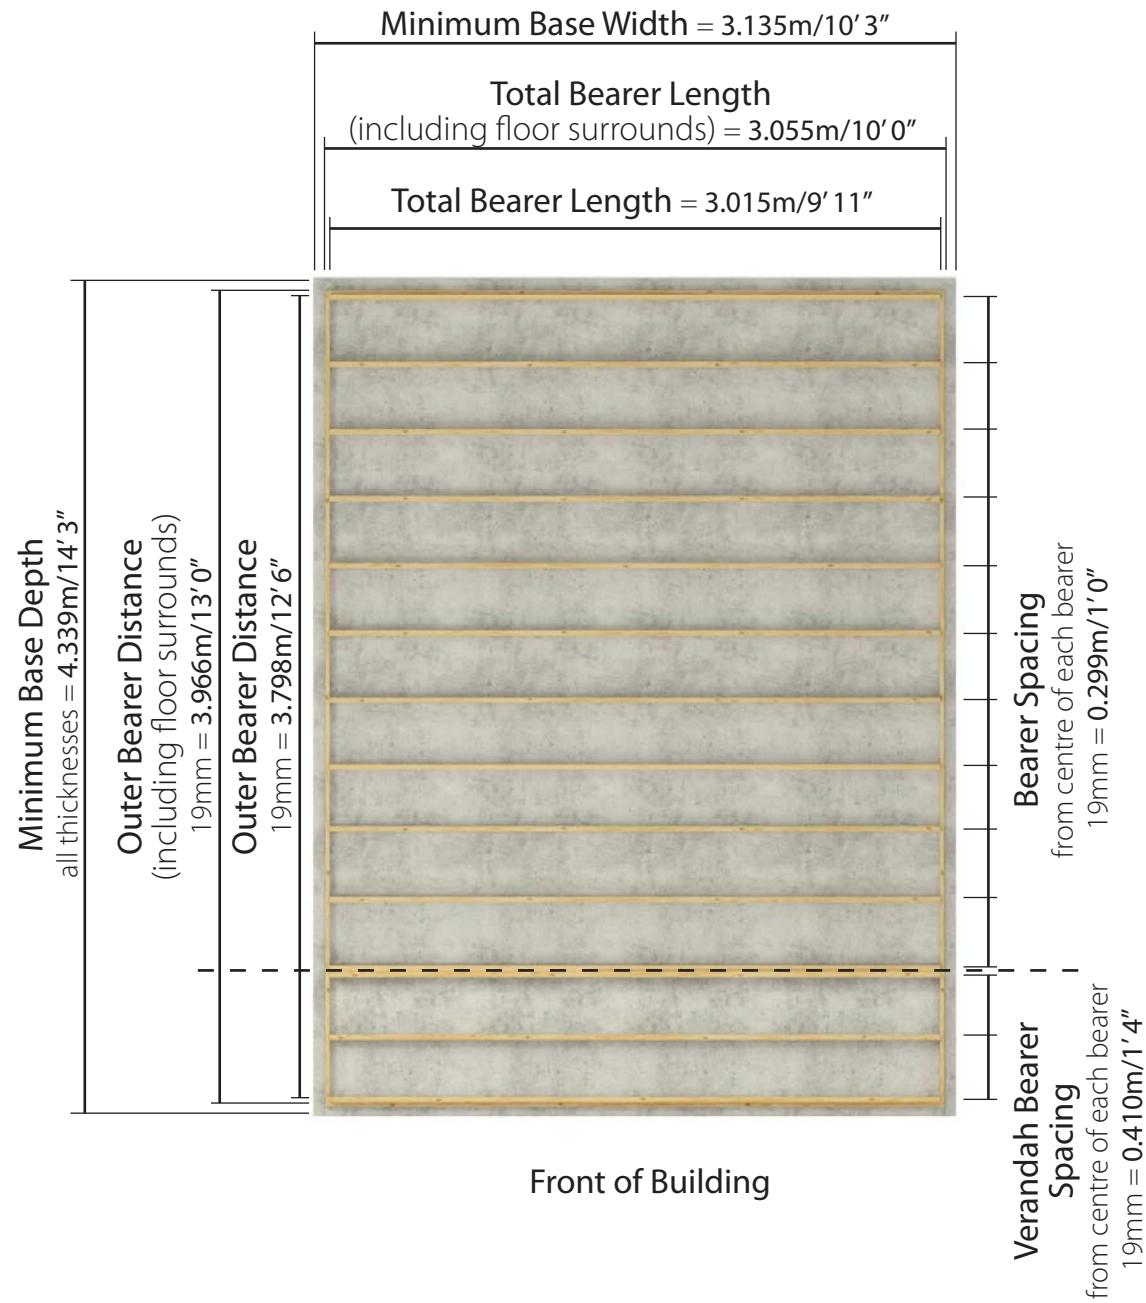

Please note: your base must be perfectly level and drainage is required to allow water to run off the surface. There must also be at least 2m clearance on each side to allow annual treatment to be applied.